




UHF RFID

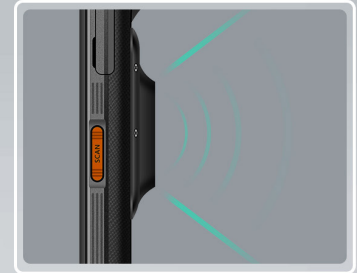

Mobile Computer

UHF RFID



Android



4G



WiFi



Bluetooth



UHF



1D Barcode



2D Barcode



IRIS



NFC



Camera



GPS

This device is an Android rugged mobile computer. It can be configured with internal UHF module with 1dBi circularly polarized antenna. With its powerful processor and wireless connections, you can find this easy-to-deploy device an exceptionally valuable helper to increase working efficiency and productivity in retail, logistics and healthcare.



Specification

Performance	
Quad-core	
CPU	Cortex-A53 Quad-core 1.45GHz
RAM+ROM	2GB+16GB
Expansion	Supports up to 128 GB Micro SD card
Operating System	Android 6.0
Octa-core	
CPU	Cortex-A53 Octa-core 2.5GHz
RAM+ROM	3GB+32GB
Expansion	Supports up to 128 GB Micro SD card
Operating System	Android 8.1
Communication	
Quad-core	
WLAN	IEEE802.11 a/b/g/n, 2.4G/5G dual-band, internal antenna
WWAN (China)	2G: 900/1800MHz
	3G: 900/1900/2000/2100MHz
	4G: B1, B3, B5, B38, B39, B40, B41
WWAN(Europe)	2G: 850/900/1800/1900MHz
	3G: 850/900/1900/2100MHz
	4G: B1, B3, B5, B7, B8, B20, B40
WWAN(America)	2G: 850/900/1800/1900MHz
	3G: 850/900/1700/1900MHz
	4G: B2, B4, B7, B12, B17
WWAN (Others)	Depending on the country's ISP
Bluetooth	Bluetooth 4.0, BLE
GNSS	GPS/AGPS, GLONASS, BeiDou, internal antenna
Octa-core	
WLAN	IEEE802.11 a/b/g/n/ac, 2.4G/5G dual-band, internal antenna
WWAN (China)	2G: 900/1800MHz
	3G: WCDMA: B1,B8
	CDMA2000 EVDO: BC0
	TD-SCDMA: B34,B39
WWAN (Europe)	4G: B1,B3,B5,B8,B34,B38,B39,B40,B41
	2G: 850/900/1800/1900MHz
	3G: B1,B2,B4,B5,B8
WWAN(America)	4G: B1,B3,B5,B7,B8,B20,B40
	2G: 850/900/1800/1900MHz
	3G: B1,B2,B4,B5,B8
WWAN (Others)	4G: B2,B4,B7,B12,B17,B25,B66
	Depending on the country's ISP
Bluetooth	Bluetooth v2.1+EDR,3.0+HS,v4.1+HS
GNSS	GPS/AGPS, GLONASS, BeiDou; internal antenna
Physical Characteristics	
Dimensions	164.2*78.8*17.5mm/6.46*3.10*0.69in
Weight	<321g/11.32oz
Display	5.2" IPS FHD 1920x1080
Touch Panel	Corning Gorilla Glass, multi-touch panel, gloves and wet hands supported
Power	Main battery: Li-ion, rechargeable, 5000mAh
	Standby: over 350 hours
	Continuous use: over 12 hours (depending on user environment)
	Charging time: 3-4 hours (with standard adaptor and USB cable)
Expansion Slot	1 slot for SIM card, 1 slot for SIM or TF card

Interfaces	USB 2.0 Type-C, OTG, Octa-core version supports TypeC headphones
Audio	Speaker, 2 microphones
Keypad	4 front keys, 1 power key, 2 scan keys, 1 multifunctional key
Sensors	Gravity sensor, light sensor, proximity sensor, vibration motor

Developing Environment

SDK	Development Kit
Language	Java
Tool	Eclipse / Android Studio

User Environment

Operating Temp.	-4°F to 122°F / -20°C to 50°C
Storage Temp.	-40°F to 158°F / -40°C to 70°C
Humidity	5%RH - 95%RH non condensing
Drop Specification	Multiple 1.8m/5.9ft drops (at least 20 times) to the concrete across the operating temperature range
Tumble Specification	1000 x 0.5m/1.6ft falls at room temperature
Sealing	IP65 per IEC sealing specifications
ESD	±15KV air discharge, ±6KV conductive discharge

Data Collection

UHF RFID	
Frequency	865MHz-868MHz / 920-925MHz / 902-928MHz
Protocol	EPC C1 GEN2 / ISO18000-6C
Antenna	Circular polarization (1dBi)
Power	1W (+10dBm to +29dBm adjustable)
R/W range	3m

* Ranges and rates depend on tags and environment

Camera	
Rear Camera	13MP Autofocus with flash
Front Camera (optional)	5MP camera
NFC	
Frequency	13.56MHz
Protocol	ISO14443A/B, ISO15693, NFC-IP1, NFC-IP2, etc.
Chips	M1 card (S50, S70), CPU card, NFC tags, etc.
Range	2-4cm

Barcode Scanning (optional)

1D Linear Scanner (Quad-core)	Zebra SE965 / Honeywell N4313
1D Symbolologies	UPC/EAN, Code128, Code39, Code93, Code11, Interleaved 2 of 5, Discrete 2 of 5, Chinese 2 of 5, Codabar, MSI, RSS, etc.
2D Imager Scanner (Quad-core)	Zebra: SE4710 / SE4750 / SE4750MR; Honeywell: N6603
2D Imager Scanner (Octa-core)	Zebra: SE2707
2D Symbolologies	PDF417, MicroPDF417, Composite, RSS, TLC-39, Datamatrix, QR code, Micro QR code, Aztec, MaxiCode; Postal Codes: US PostNet, US Planet, UK Postal, Australian Postal, Japan Postal, Dutch Postal (KIX), etc.

Iris (optional)	
Rate	<150ms
Range	20-40cm
FAR	1/100000000
Protocol	ISO/IEC 19794-6, GB/T 20979-2007

Accessories

Standard	AC Adaptor, USB Cable, Lanyard, etc.
Optional	Cradle, Holster,etc.

* For detailed specification, please check Accessory Guide.